



INOSENT
GASWARNTECHNIK AG

Eichwatt 5 | CH - 8105 Regensdorf / Switzerland Telephone: +41 (0)44 556 83 00 | Fax: +41 (0)44 556 83 01 info@inosent.ch | www.inosent.ch



# COMPANY

#### WE ARE INOSENT

Our products are defined by creativity along with constant development. Our goal is to always deliver our customers the best solution while striving to create an excellent enduring working relationship. Trust, fairness and dependability are our highest priorities. At Inosent, we are firmly convinced that the best solutions can only be found through loyal, courteous consultation and collaboration. At the same time, we are always open to new ideas and we enjoy exciting challenges. INOSENT is authentic, fair – and always there for you.

# OUR CUSTOMERS ARE IMPORTANT TO US

Our constant enthusiasm for our work is also the result of our belief in the value of genuine cooperation with our customers. We will give you honest advice that makes it possible for you to profit from our knowledge of the latest technical possibilities. Because, at the end of the day, even a technical field like gas detection technology is about human beings who are working with each other and for each other. And because of that, the honest relationship to our customers and the serious interaction with our customers is the most important thing for Inosent. INOSENT has time for you – and is always there for you.

#### WE LIKE TO FIND NEW PATHS

The world is in constant change – and, in technical fields above all, it is important to meet new possibilities with enthusiasm and creativity. When safety is the primary objective, the continual development of systems and solutions work in tandem with this goal. That is why we, at Inosent, keep our enthusiasm for innovation, and work both creatively and carefully on new solutions that can better satisfy our customers' requirements. INOSENT has time for you – and is always there for you.



# AREAS OF APPLICATION

INOSENT the brand for reliable gas detection systems.

In the workplace, gas detection systems are an indispensable safety asset across a spectrum of industrial processes. Consider the routine daily use of gases in heating and refrigeration equipment in addition to the dangerous gaseous produced from processes such as, fermentation, incineration, engine combustion to name but a few. These gases can be explosive or toxic as

well as colourless, odourless and tasteless. Gases and their presence in ambient air must therefore, be accurately and professionally monitored continuously on a 24-hour basis.

INOSENT offers you intelligent, comprehensive solutions within a wide scope of industrial applications. We will support you with constructive and competent advice so that you can plan for the highest levels of safety.

#### COOLING SYSTEMS



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

(H)FKW HFO C3H8 CO2 NH3

#### WE RECOMMEND:

- INOSENT EASY - INOSENT ULTIMATE

## UNDERGROUND CAR PARK



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

CARBON MONOXIDE CO NITROGEN DIOXIDE NO2

#### WE RECOMMEND:

- INOSENT COMPACT
- INOSENT ULTIMATE

#### GAS HEATING



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

METHANE CH4 | PROPANE C3H8

WE RECOMMEND:

- INOSENT CLASSIC

#### LABORATORY



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

O2 | CO | H2 | CO2 | NH3 | C3H8
O3 | SIH4 | PH3 | ECT.

#### WE RECOMMEND:

- INOSENT ULTIMATE

## INDUSTRY ATEX ZONE 1 & 2 SIL 1 & SIL 2



IN GENERAL, THE FOLLOWING GASES WILL BE MONITORED:

NH<sub>3</sub> | SOLVENTS | C<sub>3</sub>H<sub>8</sub> CH<sub>4</sub> | H<sub>2</sub> | ECT.

#### WE RECOMMEND:

- INOSENT PREMIUM
- INOSENT ULTIMATE



# PRODUCT LINES



# EASY





A simple, very high-quality, stand-alone compact solution for small systems:

24 VDC/AC or 230 VAC | LED status display | 85 dB-Alarm Horn 2 Relay outputs 4-20mA, 0-10VDC, Modbus RTU IP 65 Protected



# COMPACT



The ideal solution for monitoring CO and NO2 as well as humidity in underground garages:

24 VDC | 16 BUS-Inputs for gas detectors and alarm lights | 4 x 4-20mA-Input | LCD-Display | 8 Digital outputs | Output 0-10VDC, Modbus RTU




### CLASSIC





Efficient gas monitoring monitor in a wall-mounted housing for 2, 4 or 6 gas detectors:

24 V DC/AC or 230 VAC 2, 4 or 6 × 4-20mA-Input LCD-Display 4 Relay outputs | IP 65 Protected | incorporated data logger



# ULTIMATE







A versatile, intelligent gas detection system with an innovative visual display of parameters on a touch screen:

24 VDC | 90 Inputs for gas detectors, alarm lights and accessories | 7" Touch-Display | USB / RJ45-Connection | 8 Relay outputs, expandable Modbus RTU/TCP outputs, optional 0-10VDC or 4-20mA



# PREMIUM



A powerful, multi-functional gas detection system specially designed for SIL1 or SIL2 systems:

24 VDC | 256 Inputs for gas detectors (BUS or 4-20mA) LCD-Display | 8 Relay outputs, expandable | 19"-Rack or metal box incorporated data logger



# PORTABLE



Blackline Safety: Wide range of gas sensors and accessories. Alarm forwarding with location information by e-mail and SMS.

Riken Keiki: Mobile single-gas and mulit-gas devices, extremely robust, smallest and lightest five-gas meter in the world.

# 11...1 INOSENT

# COMPACT



In underground car parks, carbon monoxide (CO) and nitrogen dioxide (NO2) gases must be accurately monitored. If the CO or NO2 concentration increases, perhaps due to increased traffic in the area, there will be an acute risk of poisoning. Control of humidity is also a central requirement in underground car parks. A gas detection system for underground car parks must combine these requirements in the best possible way.



# INOSENT RECOMMENDS THE «COMPACT» PRODUCT LINE FOR UNDERGROUND CAR PARKS.

Thanks to state-of-the-art technology and a sophisticated design, «COMPACT» is the ideal solution. Exhaust gas warning lights with builtin horns are activated immediately when danger threatens, so that no one is at risk. There is also the case of alarm. For the differential humidity midity detector within the car park and a second to program and easy to install. detector outside: This is how the Compact product line ensures the best control of ventilation and humidity.

The CO and NO<sub>2</sub> detectors are, like the two moisture detectors, connected to the control centre. The control centre displays the highest measured levels as well as any alarms or malfunctions. The display also shows, at all times, a display icon showing the correct behaviour in the updated status messages from the smoke detectors and / or the differential pressure decontrol, it is necessary to have an absolute hu- tectors. The Compact product line is also easy

# THE COMPACT SOLUTION FOR UNDERGROUND CAR PARKS: THE «COMPACT» PRODUCT LINE



- RELIABLE MONITORING OF CARBON MONOXIDE AND NITROGEN DIOXIDE
- PERFECT HUMIDITY CONTROL
- COMPACT CONTROL PANEL
- GAS DETECTORS FOR MONITORING CO AND NO2; OTHER DETECTORS CAN BE CONNECTED
- LED-LIGHT WITH INTEGRATED ALARM HORN



# INOSENT COMPACT FOR UNDERGROUND CAR PARKS

WITH DIGITAL ALARM LIGHTS


SIGNAL:

MODBUS

MAX. QUANTITY GAS DETECTORS:

16







SUPPLY TO GAS DETECTORS AND ALARM LIGHTS:
INOSENT MODBUS-CABLE LI HCH:
Cable 2 × 2 x 0,75 mm², shielded, coloured, max. 1200 m



# COMPACT



# INOSENT COMPACT FOR UNDERGROUND CAR PARKS

WITHOUT DIGITAL ALARM LIGHTS


SIGNAL:

MODBUS

MAX. QUANTITY GAS DETECTORS:

16



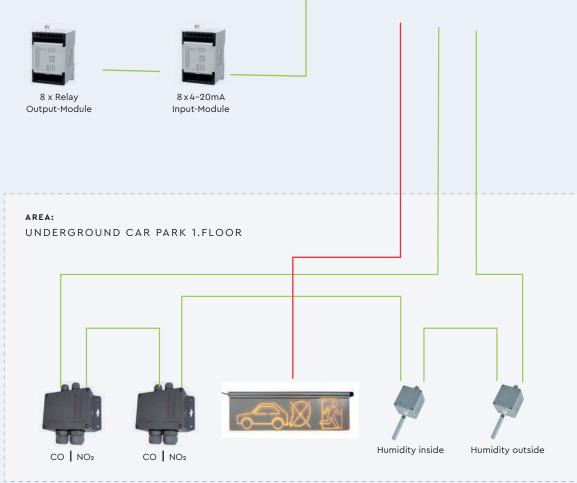

- SUPPLY TO ALARM UNITS: 24 VDC
- SUPPLY TO GAS DETECTORS:
  INOSENT MODBUS-CABLE LI HCH:
  Cable 2 × 2 x 0,75 mm², shielded, coloured, max. 1200 m



# COMPACT 200

The INOSENT Compact product line is the ideal solution for underground car parks. The control centre has up to 16 detector inputs for monitoring carbon monoxide (CO) and nitrogen dioxide (NO<sub>2</sub>). In addition, the Compact product line can activate the ventilation system when gas concentration levels exceed the programmed alarm levels. If the optional humidity detectors are connected, the integrated humidity program can measure the absolute humidity inside and outside, and activate thte ventilation system when the humidity level is too high.



#### OVERVIEW:


- 2 YEARS WARRANTY
- EASY TO MOUNT ON A DIN RAIL
- EASY-TO-READ DISPLAY
- PROGRAMMING USING PC


- DISPLAY OF GAS CONCENTRATION AND ALARM LEVELS
- INTEGRATED 0-10V OUTPUT SIGNAL FOR LINEAR CONTROL OF EC MOTORS

# TECHNICAL SPECIFICATIONS

**SUPPLY VOLTAGE:** 24 VDC | Status display for operation and malfunctions on an easyto-read LCD display | 8 build-in digital outputs | Analogue signal input: 4 × 4-20mA | Digital signal input: 16 x digital | **AVAILABLE ACCESSORIES:** Modbus-enabled LED alarm light with integrated horn, Expansion modules for additional relay outpurs or analogue inputs

# DIMENSIONS AND ELECTRONICS







# COMBINED CO/NO2-DETECTOR I2660-CO+NO2

The combined Gas detector is designed for the detection of Carbon Monoxide CO and Nitrogen Dioxide NO2 and will be mainly used in underground car parks. The Gas detector provides analogue (4-20mA and 0-10VDC) and digital (Modbus RTU) output signals. The supply of the gas detector is 24VDC or 230VAC with the optional available power supply. The light grey ABS plastic enclosure is IP 65 protected and the internal sensor can be easily replaced when its life time is over. The Gas detector operates also "standalone", without any gas monitor.




#### SPECIFCATIONS ELECTRONICS


**SUPPLY:** 11...30 VDC | **POWER CONSUMPTION:** max. 60 mA | **WIRING ANALOGUE/DIGITAL:** 3×0,75 mm2, shielded, 2×2×0,75 mm2, shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 2×4...20 mA, 2×0-10VDC, Modbus RTU | **RELAY OUTPUTS:** 2 x potential free (5A) | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

### SPECIFCATIONS CO+NO2-SENSOR

MEASURING PRINCIPLE: Electrochemical | MEASURING RANGE: 0...300 ppm CO/ 0...10 ppm NO2 ACCURACY: +/- 3 % of measuring range | RESPONSE TIME: t 90: < 60 sec | OPERATION TEMPERATURE: -20 °C ...+50 °C | HUMIDITY: 5...95 % (non condensing) | SIGNAL DRIFT: < 1 % Signal/Month APPROX. LIFETIME AT 20 °C: > 4 years, depending on application | CALIBRATION: It is necessary to recalibrate the gas detector at least once a year.

## DIMENSIONS AND ELECTRONICS







# HUMIDITY AND TEMPERATURE DETECTOR 12238-W

The detector is used to measure relative and absolute humidity and temperature. It is characterized by a high repeatability and stability. The detector has analogue and digital output signals. The plastic housing is splash-proof (IP 65), which allows the detector to be mounted outdoors. The detector can optionally be ordered as a duct mounting version (DM) or as a version with remote sensor.



#### SPECIFCATIONS ELECTRONICS

**SUPPLY:** 11...30 VDC | **POWER CONSUMPTION:** max. 60 mA | **WIRING ANALOGUE/DIGITAL:** 3×0,75 mm2, shielded, 2×2×0,75 mm2, shielded | **SIGNAL-OUTPUT ANALOGUE/DIGITAL:** 4...20 mA, 0-10VDC, Modbus RTU | **WEIGHT:** 500 gr | **CERTIFICATES:** CE

## SPECIFCATIONS SENSOR

MEASURING PRINCIPLE: 0...100 % rH, 0...300 g/m3 absolute humidity, -40...+85 °C


measuring range:  $\pm 2.5 \text{ %rH/} \pm 0.3 \text{ °C}$ operation temperature:  $-40 \text{ °C} \dots +85 \text{ °C}$ 

HUMIDITY: 0...95 % (non condensing)

**RESPONSE TIME:** t 90: < 15 sec

APPROX. LIFETIME: > 10 Jahre, depending on the application

## ELECTRONICS





# LED-WARNING SIGN WITH HORN TYPE 160 (BUS-COMPATIBLE)

The 60 cm long LED-Sign with bright red LED's may be used for most types of Gas Alarm. The LED-Sign can be used with a flashing or a continuous light and includes the option to pre-select text or pictograms in different colours, depending on the client's request. The supply voltage of the LED-Sign is 24VDC and it incorporates a 92dB Alarm horn, which can be controlled separately from the LED's.

The LED-Sign in combination with the INOSENT BUS-compatible 'Ultimate' or 'Compact' controller allows for independent programming of the LED's and sounder in different alarm modes. This design function facilitates a simple installation on the same BUS-Cable as the gas detectors, eliminating the need for additional cable. The LED-Sign is also available with 30 cm length one sided (standard) or double-sided.




### LED-SIGN (ELECTRONICS)

**SUPPLY VOLTAGE:** 24 VDC | **POWER:** max. 2 W | **SUPPLY ANALOGUE (24V)/DIGITAL:** 2x 0,75 mm, 2×2×0,8 mm2, shielded | **PROTECTION CLASS:** IP 52 | **VOLUME:** ca. 92 dB |

LIFETEIME LEDS: 50'000 h | WEIGHT: 400 gr | CERTIFICATIONS: CE

#### DIMENSIONS AND CONNECTIONS





# CONTACT

### INOSENT IS THERE FOR YOU

Regardless of the reason for your interest in the area of gas detection technology: Contact us and we will do our best to find the optimum solution for you.

We will be happy to go into detail with you and address your specific ideas and concerns - because you can always depend on INOSENT.

INOSENT Gaswarntechnik AG

Eichwatt 5

CH-8105 Regensdorf / Switzerland

Telephone: +41 (0)44 556 83 00 Fax: +41 (0)44 556 83 01 E-Mail: info@inosent.ch